


## imageRUNNER 2700 Series

# ROBUST, RELIABLE AND HIGHLY EFFICIENT A3 MONO MULTIFUNCTION PRINTERS

### MAIN CONFIGURATION OPTIONS

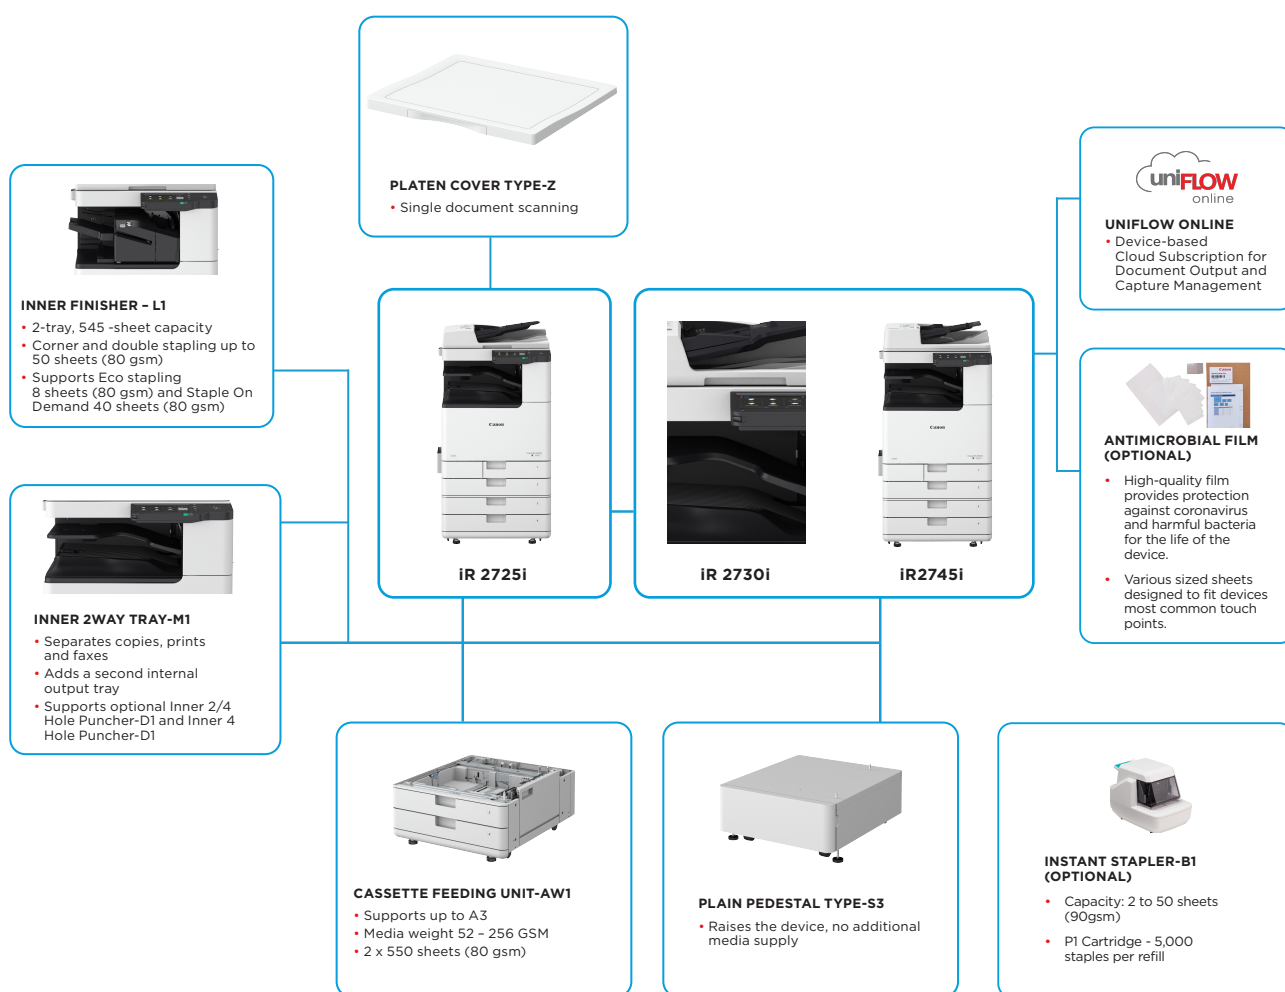

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility, please refer to the Online Product Configurator or consult your sales representative.

# TECHNICAL SPECIFICATIONS

# imageRUNNER 2700 Series

## MAIN UNIT

Machine type	A3 Monochrome Laser Multifunctional
Core functions	Print, Copy, Scan, Send and Optional Fax
Processor	1GHz Dual Core Processor
Control Panel	17.8 cm/7-inchTFT LCD WSVGA Colour Touch panel
Memory	2.0GB RAM
Storage	64GB eMMC (available space 30GB)
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)

## OTHERS

Paper Supply Capacity (A4, 80gsm)	Standard: 1,200 sheets Maximum: 2,300 sheets (with Cassette Feeding Unit-AW1)
Paper output capacity (A4, 80gsm)	Standard: 250 sheets Maximum: 645 sheets (with Inner Finisher-L1 and Copy Tray-T2)
Finishing Capabilities	Collate, Group, Offset, Staple, Hole Punch, Eco Staple, Staple On Demand * Finishing capabilities vary depending on the options connected.
Supported Media Types	Main Body Cassette (Upper/Lower): Thin, Plain, Recycled, Color, Heavy, Bond, Pre-Punched, Letterhead, PostCard  Multi-purpose Tray: Thin, Plain, Recycled, Color, Heavy, Bond, Pre-Punched, Letterhead, Postcard, Labels, Coated, Tracing

## Supported Media Sizes

Upper Cassette:	Standard size: A4, A5, A5R, A6R, B5 Custom Size: 105.0 x 148.0 mm to 297.0 x 215.9 mm
Lower Cassette:	Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, COM 10 No. 10*, Monarch*, DL* *Envelope Attachment A is required Custom Size: 105 x 148 mm to 304.8 x 457.2 mm
Multi-purpose tray:	Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, COM 10 No. 10, Monarch, ISO-C5, DL Custom size: 98.4 x 139.7 mm to 320.0 x 457.3 mm Envelopes: 98.0 x 98.0 mm to 320.0 x 457.2 mm

## Supported Media Weights

Main Body Cassette (Upper/Lower):	52 to 256 gsm
Multi-purpose tray:	52 to 300 gsm*
*Supported paper weight with Media Adjustment Kit-A1:	60-300 gsm
Duplex:	52 to 220 gsm
4 Seconds or Less*	* Time from device power on to when copy icon appears and is enabled to operate on the touch panel display
From Sleep Mode:	10 seconds or less
From Power On:	10 Seconds or Less*
*Time from device power on, until copy ready (not print reservation)	

## Warm-up Time (Quick start mode: ON)

Dimensions (W x D x H)	2745i: 565 x 687 x 891 mm 2730i: 565 x 693 x 877 mm 2725i: 565 x 693 x 877 mm (With DADF-AZ1) 565 x 659 x 788 mm (With Platen Cover Z)
------------------------	---

## Installation Space (W x D)

Basic:	978 x 1,089 mm (with Platen Cover-Z + right door & multi-purpose tray opened + paper cassette opened)
Fully Configured:	1,286 x 1,116 mm (with DADF-B A1 + Inner Finisher tray max extended + Copy Tray-T2 max extended + paper cassette opened)

## Weight

2745i:	65kg
2730i:	64kg
2725i:	64kg (With DADF-AZ1) 58kg (With Platen Cover Z)

## PRINT SPECIFICATIONS

Print Speed(BW)	iR2745i: Simplex: Up to 45 ppm (A4, A5, A5R, A6R), Up to 22 ppm (A3), Up to 32 ppm (A4R)  iR2730i: Simplex: Up to 30 ppm (A4, A5, A5R, A6R), Up to 15 ppm (A3), Up to 20 ppm (A4R)  iR2725i: Simplex: Up to 25 ppm (A4, A5, A5R, A6R), Up to 15 ppm (A3), Up to 20 ppm (A4R)
Print Resolution (dpi)	1200 x 1200
Page description languages	Standard: UFR II, PCL6, Optional: Adobe® PostScript3
Direct Print	PDF, EPS, TIFF/JPEG, XPS
Printing from mobile and cloud applications	AirPrint, Mopria, Canon PRINT Business, uniFLOW Online and Universal Print by Microsoft compatibility A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.
OS Standard Printing	Android, Windows® 10/11, Chrome OS, macOS (11.2.2 or later), iOS (15.2 or later), iPadOS

## Fonts

PS fonts:	136 Roman, PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT J/K/S/T* (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts* <sup>2</sup> * Optional PCL International Font Set-A1 is required. ** Optional Barcode Printing Kit-D1 is required.
-----------	---

## Print Features

Secure Print, Secure Watermark, Header/Footer, Page Layout, Duplex Printing, Mixed Paper Sizes/ Orientations, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
--

## Operating System

UFR II: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022, Mac OS X (10.11 or later) PCL: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022 PS: Windows® 8.1/10/11/Server2012/Server2012 R2/Server2016/Server2019/Server2022, Mac OS X (10.11 or later) PPD: Windows® 8.1/10/11, Mac OS X (10.11 or later)
---

## COPY SPECIFICATIONS

Copy Speed	iR2745i: Simplex: Up to 45 ppm (A4, A5, A5R, A6R), Up to 22 ppm (A3), Up to 32 ppm (A4R)  iR2730i: Simplex: Up to 30 ppm (A4, A5, A5R, A6R), Up to 15 ppm (A3), Up to 20 ppm (A4R)  iR2725i: Simplex: Up to 25 ppm (A4, A5, A5R, A6R), Up to 15 ppm (A3), Up to 20 ppm (A4R)
First-Copy-Out Time (A4)	iR2745i: 5.3 seconds iR2730i: 7.0 seconds iR2725i: 7.0 seconds

## Copy resolution (dpi)

600 x 600
-----------

## Multiple Copies

Up to 9,999 copies
--------------------

## Copy Density

Automatic or Manual (9 Levels)
Variable zoom: 25% to 400% (1% Increments)
Preset reduction/enlargement: 25%, 50%, 70%, 100% (1:1), 141%, 200%, 400%

## Magnification

Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Sort, Job Build, N on 1, Different Size Originals, Sharpness, Erase Frame, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample
---

## Copy Features

Variable zoom: 25% to 400% (1% Increments)
Preset reduction/enlargement: 25%, 50%, 70%, 100% (1:1), 141%, 200%, 400%

## SCAN SPECIFICATIONS

Selectable type	iR2745i: Standard Document Feeder DADF-BA1 iR2730i: Standard Document Feeder DADF-AZ1 iR2725i: Standard Document Feeder DADF-AZ1 or optional Platen Cover Type Z
Document Feeder Paper Capacity (80 gsm)	DADF-BA1: up to 100 Sheets DADF-AZ1: up to 50 Sheets
Acceptable Originals and weights	Platen: Sheet, Book and 3-Dimensional objects  Document Feeder media weight : DADF-BA1: 1-sided scanning: 38 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)  DADF-AZ1: 1-sided scanning: 38 to 128 gsm (BW/CL) 2-sided scanning: 52 to 128 gsm (BW/CL)  Platen: max. scanning size: 297.0 x 431.8 mm
Supported media sizes	DADF-BA1: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6, Custom size: 139.7 x 128.0 mm to 297.0 x 431.8 mm  DADF-AZ1: A3, A4, A4R, A5, A5R, B5, B5R, B4R Custom size: 128.0 x 148.0 mm to 297.0 x 431.8 mm

## Scan Speed (ipm: BW/CL; A4)

DADF-BA1:	1-sided Scanning: 70/70 (300 x 300 dpi, send), 51/51 (600 x 600 dpi, copy) 2-sided Scanning: 35/35 (300 x 300 dpi, send), 25.5/25.5 (600 x 600 dpi, copy)
DADF-AZ1:	1-sided Scanning: 35/25 (300 x 300 dpi, send), 25 (BW; 600 x 600 dpi, copy) 2-sided Scanning: 12/8 (300 x 300 dpi, send), 8 (BW; 600 x 600 dpi, copy)

## Scan Resolution (dpi)

Scan for Copy: 600 x 600 Scan for Send: (Push) 600 x 600 (SMB/FTP/WebDAV/FAX), (Pull) 600 x 600 Scan for Fax: 600 x 600
--

## Pull Scan Specifications

Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows® 8.1/10/11/Server2012/Server2012 R2/Server 2016/Server 2019/Server 2022
---

## Scan Method

PushScan, PullScan, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud-based services (uniFLOW Online/Online Express)
--



# TECHNICAL SPECIFICATIONS

# imageRUNNER 2700 Series

## SEND SPECIFICATIONS

<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP, WebDAV Optional: Super G3 FAX
<b>Address Book</b>	LDAP (2,000)/ Local (1,600)/ Speed dial (200)
<b>Send resolution (dpi)</b>	Push: up to 600 x 600 Pull: up to 600 x 600
<b>Communication protocol</b>	FTP (TCP/IP), SMB3.0 (TCP/IP), WebDAV Email/iFax: SMTP (send), POP3 (receive)
<b>File Format</b>	Standard: TIFF (MMR), JPEG*, PDF (Compact, Searchable, PDF/A-1b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature, Office Open XML (PowerPoint, Word)  Optional: PDF (Trace & Smooth), PDF/XPS (User Signature) *Single page only
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation

## FAX SPECIFICATIONS

<b>Optional/ standard</b>	Optional on all models
<b>Maximum Number of Connection Lines</b>	1
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps
<b>Compression Method</b>	MH, MR, MMR, JBIG
<b>Resolution (dpi)</b>	200x100dpi (Standard), 200x200dpi (Fine), 200x400 dpi (Super Fine), 400x400 dpi (Ultra Fine)
<b>Sending/Recording Size</b>	Sending: A3, A4, A4R, A5 <sup>1</sup> , A5R <sup>1</sup> , B4, B5 <sup>2</sup> , B5R <sup>1</sup> Receiving: A3, A4, A4R, A5R, B4, B5, B5R  <sup>1</sup> Sent as A4 <sup>2</sup> Sent as B4 short
<b>FAX memory</b>	Up to 30,000 pages (2,000 jobs)
<b>Speed dials</b>	Max. 200
<b>Group dials/destinations</b>	Max. 199 dials
<b>Sequential broadcast</b>	Max. 256 addresses
<b>Memory backup</b>	Yes
<b>Fax Features</b>	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox

## STORE SPECIFICATION

<b>Memory Media</b>	USB Memory
---------------------	------------

## SECURITY SPECIFICATIONS

<b>Authentication and Access Control</b>	User Authentication (Picture Login, Picture and PIN Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
<b>Document Security</b>	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print <sup>1</sup> ), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/ XPS, User Signature PDF/XPS <sup>2</sup> ), Send Data Security (Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support)  <sup>1</sup> Requires optional uniFLOW Online / uniFLOW <sup>2</sup> Requires optional Universal Send Digital User Signature Kit-C1
<b>Network Security</b>	TLS 1.3, IPSec, IEEE802.1X authentication, SNMPv3, Firewall, Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Enabling/Disabling (Network Applications, Remote UI, USB Interface), G3 FAX separation from LAN, USB Port separation from LAN, Scan and Send -Virus Concerns for E-mail Reception
<b>Device Security</b>	Standard Storage Initialize, Job Log Conceal Function, Protecting MFP Software Integrity, Verify System at Startup, Runtime Intrusion Detection
<b>Device Management and Auditing</b>	Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Security Policy Setting
<b>ENVIRONMENTAL SPECIFICATIONS</b>	
<b>Operating Environment</b>	Temperature: 10 to 30°C Humidity: 20 to 80% RH (Relative Humidity)
<b>Power source</b>	EUR: 220-240V 50/60Hz 10A

## Power consumption

Maximum: Approx. 1,500 W Copying (with DADF continuous scan): Approx. 666 W <sup>1</sup> Standby: Approx. 28.1 W <sup>1</sup> Sleep Mode: Approx. 1.0 W <sup>2</sup>
---

<sup>1</sup> Reference value: measured one unit  
<sup>2</sup> 1.0W is not available in all circumstances due to certain settings.

Typical Electricity Consumption (TEC)* :
iR2745i: 0.53 kWh
iR2730i: 0.37 kWh
iR2725i: 0.31 kWh

\* As per USA Energy Star 3.0

## Noise levels (BW/CL)

Sound Power Level (LWA,m) Active (BW)(1-sided)
iR2745i: 6.4B, Kv 0.3B
iR2730i: 6.0B, Kv 0.3B
iR2725i: 6.1B, Kv 0.3B

\*Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)

Sound Pressure (LpAm) Bystander's position: Active(BW/CL)(1-sided):
iR2745i: 51dB/49dB
iR2730i: 48dB/47dB
iR2725i: 48dB/47dB

\* Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)

## Standards for Environmentally Friendliness

## CONSUMABLES

<b>Toner Cartridge/s</b>	C-EXV 63 Toner Black
<b>Toner (Estimated Yield @ 6% Coverage)</b>	30,000 pages

## SOFTWARE AND PRINTER MANAGEMENT

<b>Tracking and reporting</b>	uniFLOW Online Express/optional uniFLOW Online*
-------------------------------	---

\*For more information, please refer to:  
uniFLOW Online Express ([https://canon.a.bigcontent.io/v1/static/uniFLOW\\_online\\_express\\_em\\_final\\_it/](https://canon.a.bigcontent.io/v1/static/uniFLOW_online_express_em_final_it/))  
uniFLOW Online (<https://www.canon-europe.com/business/products/software/uniFLOW-online/>)

## Remote management tools

iW Management Console
eMaintenance
Content Delivery System
Remote Operator's Software Kit
ScanGear

## Scanning software

## PAPER SUPPLY OPTIONS

<b>Cassette Feeding Unit-AW1</b>	Paper Capacity: 550 sheets x 2 (1,100 sheets) (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 565 x 635 x 248 mm Weight: Approx. 16.0 kg
----------------------------------	---

## OUTPUT OPTIONS

<b>Inner 2way Tray-M1</b>	Tray Capacity (with 80 gsm paper) Upper tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: 100 sheets Lower tray (standard tray): A4, A5, A5R, A6R, B5, B5R: up to 250 sheets SRA3, A3, A4R, B4: up to 100 sheets Paper Weight: 52 to 300 gsm Dimensions (W x D x H): 428 x 405 x 88 mm Weight: Approx. 0.7 kg
<b>Copy Tray-T2</b>	Capacity (with 80gsm paper): A4, A5R, B5, B5R: 100 sheets A3, A4R, B4: 65 sheets Dimensions (W x D x H): 442 x 373 x 176 mm (attached to the main unit, when the extension tray is extended)Weight: 0.5 kg

## Inner Finisher-L1

Upper Tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R: approx. 45 sheets
Lower Tray: A4, A5, A5R, B5: approx. 500 sheets SRA3, A3, A4R, B4, B5R: 250 sheets A6R: 30 sheets Envelope: 10 sheets
Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: A4, B5: 50 sheets (52 to 90 gsm) A4R: 40 sheets (52 to 90 gsm) A3, B4: 30 sheets (52 to 90 gsm) Eco Staple: A3, A4, B4, B5: 10 sheets (52 to 64 gsm) 8 sheets (65 to 81.4 gsm) 6 sheets (82 to 105 gsm) Staple On Demand: approx. 40 sheets (80 gsm) Dimensions (W x D x H): 727 x 525 x 225 mm (attached to the main unit, when the extension tray is extended) Weight: Approx. 9.1 kg



# TECHNICAL SPECIFICATIONS

# imageRUNNER 2700 Series

Inner 2/4 Hole Puncher-D1	(Requires Inner Finisher-L1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes A3, A4, A4R, A5, B4, B5, B5R, Four holes A3, A4
Inner 4 Hole Puncher-D1	(Requires Inner Finisher-L1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R
<b>HARDWARE ACCESSORIES</b>	
Card Readers	CopyCard Reader-F1 Copy Card Reader Attachment-H3 IC Card Reader Attachment-B4 Option Attachment kit for Reader-A2
<b>OTHERS</b>	
Platen Cover Type Z	
<b>SECURITY OPTIONS</b>	
Data Security	Picture Login-A1
<b>SYSTEM AND CONTROLLER OPTIONS</b>	
Print Accessories	PCL International Font Set-A PS Printer Kit-BT1 Barcode Printing Kit-D1
Send Options	Universal Send Trace & Smooth PDF Kit-A1 Universal Send Digital User Signature Kit-C1
System Accessories	Copy Control Interface Kit-D1
Fax Accessories	Super G3 FAX Board-BJ1 Remote Fax Kit-A1
<b>OTHER OPTIONS</b>	
Accessibility Accessories	ADF Access Handle-A1
Staple Cartridges	Staple-P1
Device protection	Antimicrobial Film: Various Sheets designed to fit the device's most common touch points*

\*Application by a Service engineer is recommended

## Software & Solutions



## Compatibility



Canon Inc.  
 canon.com  
 Canon Europe  
 canon-europe.com  
 English edition  
 © Canon Europa N.V., 2022